

OMP-160 175 bar PN: 683030 Std. drum 683352 Long drum
---

## Introduction

### ► Feature

Line pull (1 <sup>st</sup> layer):	13,600 kg / 30,000 lb (SAE J706 rating )
Line speed (1 <sup>st</sup> layer):	5.0 mpm at 60 l / min
Operation pressure:	150 bar (2,175 psi) 175 bar ( 2,540 psi )
Brake:	Multi-disc brake and counterbalance valve providing full 100% braking
Clutch ( free spool ):	Air clutch for rapid wire rope payout
Recommended wire rope:	16 mm x 43 m for Std. drum, 16 mm x 75 m for Long drum, 1,960 N/mm <sup>2</sup> grade a minimum breaking strength of 179 KN required
Hydraulic system:	PTO/power take off unit driven pump

### ► Unpacking

• Winch assembly.....	1pc
• Roller fairlead.....	1pc
• Counterbalance valve.....	1pc
• Cable tensioner.....	1pc

### ► Read this manual carefully


- Carefully read and understand this manual before operating the winch.
- Careless winch operation may result in personal injury, danger to others and or damage to property

# Installation


Before using the winch ensure all electrical components are in good condition and all connections are sound.

## ► Mounting

- Winch shall be mounted on a flat and hard surface.
- Winch should be mounted as closed to center and as perpendicular as possible to the direction of the load
- Wire rope shall be in an under-wound orientation only.
- Eight (8) M16 x 40, 12.9 grade high tensile steel bolts must be used in order to sustain the loads imposed on the winch.
- Two (2) M10 X 25, 12.9 grade high tensile steel bolts must be used to fasten the roller fairlead to the mounting channel.
- It is always preferred to use both tie bars in the final installed configuration.
- If there is a rope pileup on one end of the drum, reverse the winch to relieve the load and move your anchor point further to the center of the vehicle. Then you can rewind for a neat layer of the rope.



## ► Hydraulic System

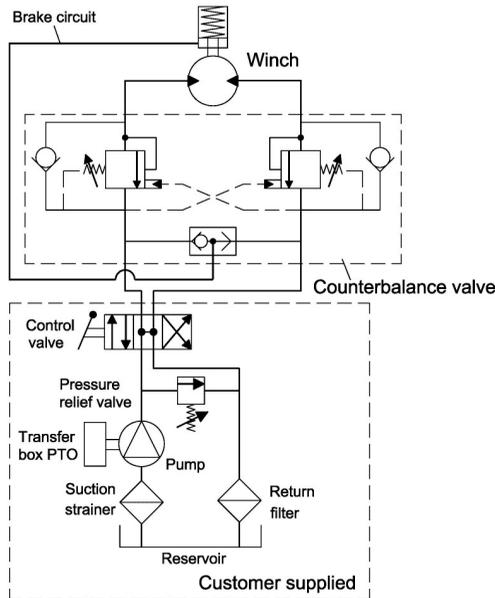

( Powered by PTO / power take off unit driven pump )

The installation of the counterbalance valve supplied is required for 100% braking

## Warning

- The winch is not to be used for transporting or lifting of personnel.
- The rated line pull shown is based on the first layer of rope on the drum.
- The rope shall remain with at least 5 wraps on the drum at all times

## Warranty

Comeup Industries Inc. takes the responsibility for all parts and components to be free from defects in materials and workmanship appearing under normal use for one year from the date of purchase.


## Parts List

Item No.	Description	Part No.	Qty
1	Hydraulic motor kit for OMR-160	882181	1
	Hydraulic motor kit for OMP-160	882186	
2	Multi-disc brake kit	881971	1
3	Motor support rack	881972	1
4	Motor coupling kit	881973	1
5	Drum bushing	880204	2
6	Drum kit, Std. drum	881974	1
	Drum kit, Long drum	882188	
7-1	Tie bar kit, Std. drum	881975	2
	Tie bar kit, Long drum	882189	
8	Gearbox support rack kit	881976	1
9	2 <sup>nd</sup> stage carrier	881977	1
10	1 <sup>st</sup> stage carrier	881978	1
11	1 <sup>st</sup> shaft kit, Std. drum	881979	1
	1 <sup>st</sup> shaft kit, Long drum	882191	
12	1 <sup>st</sup> gear	882052	1
13	1 <sup>st</sup> & 2 <sup>nd</sup> ring gear kit	881980	1
14	Gearbox rear cover kit	881981	1
15	Air inlet cover kit	881982	1
16	Cable tensioner, Std. drum	881983	1
	Cable tensioner, Long drum	882195	
17	Roller fairlead, Std. drum	880160	1
	Roller fairlead, Long drum	882238	

# Winch Assembly

683030

683352

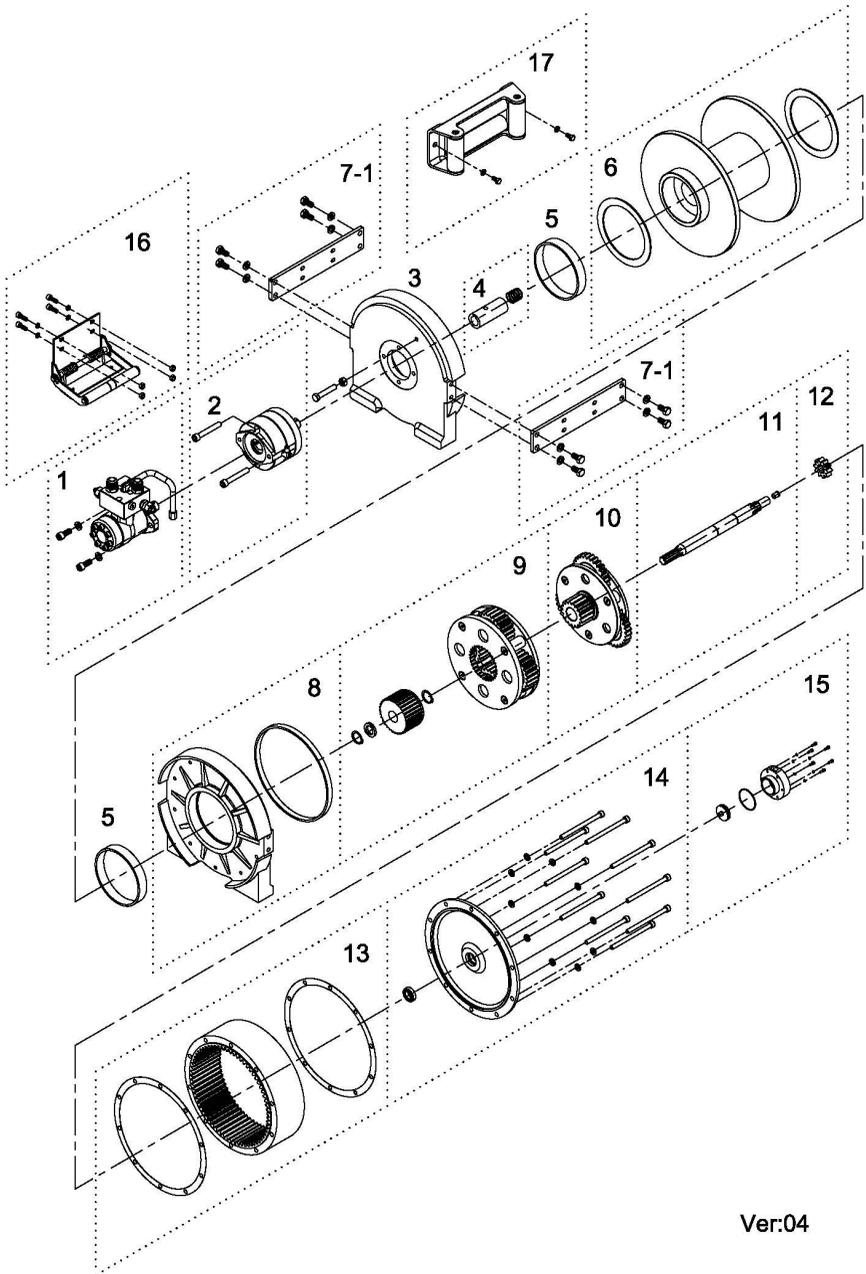

Ver:04